


RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR1018D-2 (SR3369D-2)	
Measurements	Metric	Imperial
Work Height Max.	12m	39'4"
A Platform Height-Raised	10m	32'10"
B Platform Length	2.79m	9'2"
C Extension Deck	1.52m	5'
D Platform Length With Extension Deck	4.31m	14'2"
E Platform Width	1.6m	5'3"
F Overall Length	3.76m	12'4"
G Overall Width	1.79m	5'10"
H Overall Height-Guardrails Up	2.57m	8'5"
I Overall Height-Guardrails Down	1.88m	6'2"
J Wheelbase	2.3m	7'7"
Ground Clearance	0.215m	8.5"

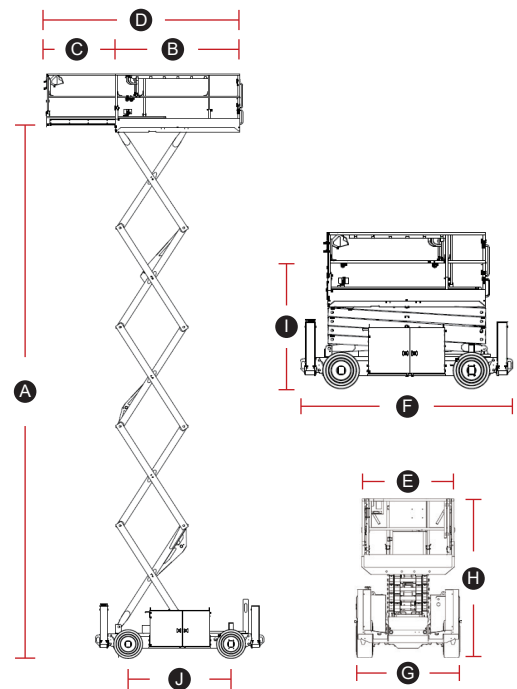

PRODUCTIVITY

Max. Platform Occupants	4(in) / 2(out)	
Platform Capacity	454kg	1,000 lbs
Platform Capacity-Extension Deck	140kg	310 lbs
Drive Height	Full Height	
Gradeability-Stowed	35%	
Min. Turning Radius	3m	9'10"
Raise/Lower Speed	39s / 46s	
Drive Mode	4x4x2	
Tire Type	Foam-filled	
Tire Size	663x283mm	26"x11"

POWER

Power Source	Kubota 18.2kW/24.4hp
--------------	----------------------

WEIGHT

Machine Weight	4,400kg	9,700 lbs
----------------	---------	-----------

STANDARD FEATURES

- Proportional controls
- Foldable guardrail
- Emergency descent
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Floating function
- Automatic braking system
- Over-tilt protection system
- Safety arm for troubleshooting
- Telematics
- Alarm
- Hydraulic outriggers
- AC power to platform

OPTIONS

- Foam-filled Non-marking tires
- Solid tires
- Solid Non-marking tires

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.