


RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR1323D-2 (SR4390D-2)	
Measurements	Metric	Imperial
Work Height Max.	15m	49'3"
A Platform Height-Raised	13m	42'8"
B Platform Length	4.81m	15'9"
C Extension Deck	1.45m/1.14m	4'9"/3'9"
D Platform Length With Extension Deck	7.4m	24'3"
E Platform Width	1.83m	6'
F Overall Length	4.9m	16'1"
G Overall Width	2.29m	7'6"
H Overall Height-Guardrails Up	2.99m	9'10"
I Overall Height-Guardrails Down	2.29m	7'6"
J Wheelbase	2.85m	9'4"
Ground Clearance	0.2m	7.9"

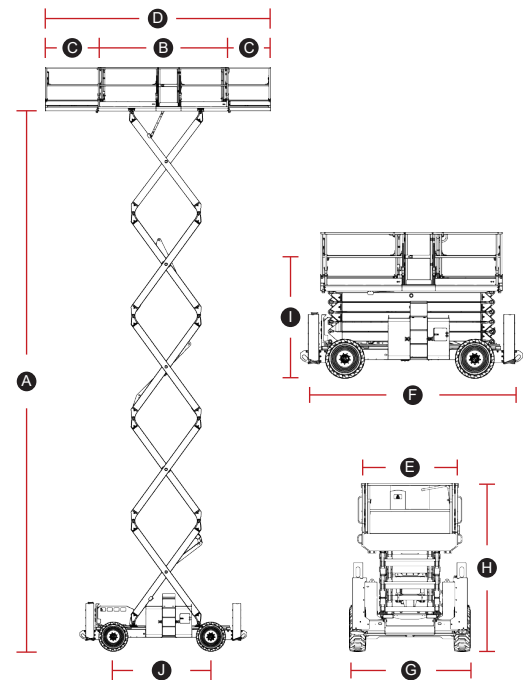

PRODUCTIVITY

Max. Platform Occupants	7(in) / 7(out)	
Platform Capacity	680kg	1,500 lbs
Platform Capacity-Extension Deck	230kg	510 lbs
Drive Height	9m	29'6"
Gradeability-Stowed	40%	
Min. Turning Radius	6.57m	21'7"
Raise/Lower Speed	55s / 55s	
Drive Mode	4x4x2	
Tire Type	Foam-filled	
Tire Size	710x220mm	28"x9"

POWER

Power Source	Kubota 18.2kW/24.4hp	
--------------	----------------------	--

HYDRAULIC SYSTEM

Hydraulic Oil Capacity	140L	37gal
------------------------	------	-------

WEIGHT

Machine Weight	7,420kg	16,358 lbs
----------------	---------	------------

STANDARD FEATURES

- Proportional controls
- Foldable guardrail
- Emergency descent
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Floating function
- Automatic braking system
- Over-tilt protection system
- Safety arm for troubleshooting
- Telematics
- Alarm
- Hydraulic outriggers
- AC power to platform

OPTIONS

- Foam-filled Non-marking tires

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.