



SR0818E-2

RT SCISSOR LIFT



The 2 Series




- The structural components are designed to be lightweight yet solid and durable, effectively reducing energy consumption, and improving working time.
- The powertrain system provides faster response, smooth transmission, and high transmission efficiency.
- Energy-saving and highly efficient hydraulic system with strong anti-pollution capabilities to ensure stable system operation and reduced maintenance costs.

ELECTRIC RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR0818E-2 (SR2669E-2)	
Measurements	Metric	Imperial
Work Height Max.	9.8m	32'2"
A Platform Height-Raised	7.8m	25'7"
B Platform Length	2.79m	9'2"
C Extension Deck	1.52m	5'
D Platform Length With Extension Deck	4.31m	14'2"
E Platform Width	1.6m	5'3"
F Overall Length	3.76m	12'4"
G Overall Width	1.79m	5'10"
H Overall Height-Guardrails Up	2.52m	8'3"
I Overall Height-Guardrails Down	1.83m	6'
J Wheelbase	2.3m	7'7"
Ground Clearance	0.215m	8.5"

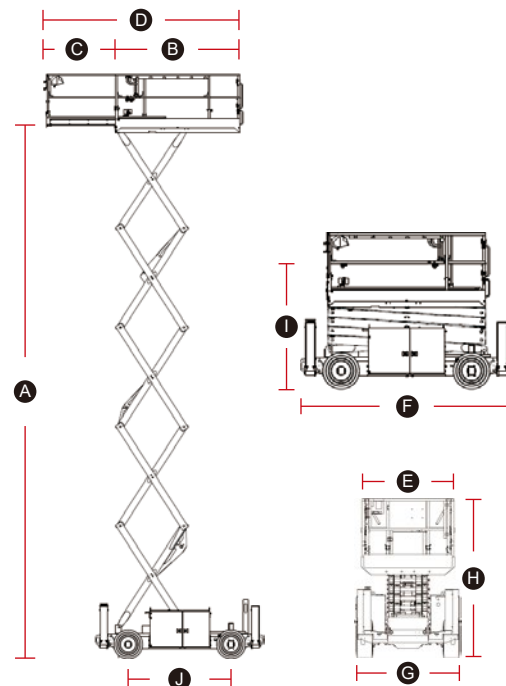

PRODUCTIVITY

Max. Platform Occupants (in/out)	4(in) / 4(out)	
Platform Capacity	680kg	1,499 lbs
Platform Capacity-Extension Deck	140kg	310 lbs
Drive Height	Full Height	
Gradeability-Stowed	35%	
Min. Turning Radius	3m	9'10"
Raise/Lower Speed	35s / 30s	
Brakes	Rear-wheel Brake	
Drive Mode	4x4x2	
Tire Type	Foam-filled Non-marking	
Tire Size	663x283mm	26"x11"
Ground Pressure, Tyres	471.5 kPa	68.4 psi

POWER

Lead-acid Battery	72V 100Ah	
-------------------	-----------	--

HYDRAULIC SYSTEM

Hydraulic Oil Capacity	50L	13.2gal
------------------------	-----	---------

WEIGHT

Machine Weight	4,190kg	9,237 lbs
----------------	---------	-----------

STANDARD FEATURES

- Proportional control
- Foldable guardrail
- Emergency descent
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Floating function
- Automatic braking system
- Over-tilt protection system
- Safety arm for troubleshooting
- Telematics
- Alarm
- One-way platform extension deck
- Hydraulic outriggers
- Non-marking tyres

OPTIONS

- AC power to platform

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.