



SR1018E-2

RT SCISSOR LIFT



The 2 Series



- The structural components are designed to be lightweight yet solid and durable, effectively reducing energy consumption, and improving working time.
- The powertrain system provides faster response, smooth transmission, and high transmission efficiency.
- Energy-saving and highly efficient hydraulic system with strong anti-pollution capabilities to ensure stable system operation and reduced maintenance costs.




www.lgmglifts.com

ELECTRIC RT SCISSOR LIFT

SPECIFICATIONS

MODELS	SR1018E-2 (SR3369E-2)	
Measurements	Metric	Imperial
Work Height Max.	12m	39'4"
A Platform Height-Raised	10m	32'10"
B Platform Length	2.79m	9'2"
C Extension Deck	1.52m	5'
D Platform Length With Extension Deck	4.31m	14'2"
E Platform Width	1.6m	5'3"
F Overall Length	3.76m	12'4"
G Overall Width	1.79m	5'10"
H Overall Height-Guardrails Up	2.57m	8'5"
I Overall Height-Guardrails Down	1.88m	6'2"
J Wheelbase	2.3m	7'7"
Ground Clearance	0.215m	8.5"

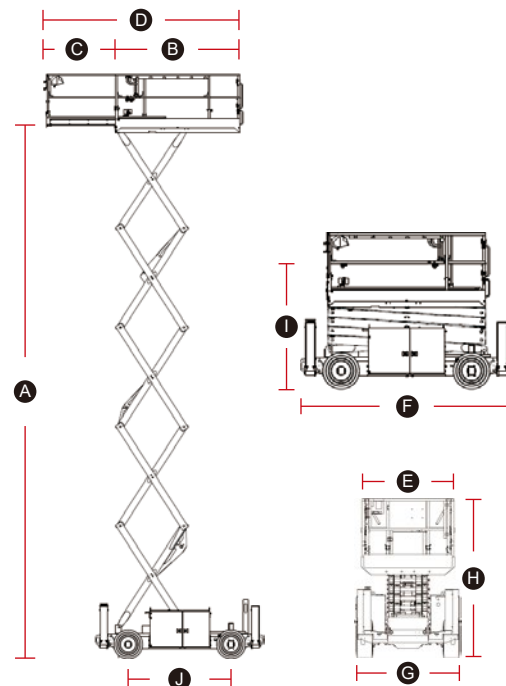

PRODUCTIVITY

Max. Platform Occupants (in/out)	4(in) / 2(out)	
Platform Capacity	454kg	1,001 lbs
Platform Capacity-Extension Deck	140kg	310 lbs
Drive Height	Full Height	
Gradeability-Stowed	35%	
Min. Turning Radius	3m	9'10"
Raise/Lower Speed	39s / 46s	
Brakes	Rear-wheel Brake	
Drive Mode	4x4x2	
Tire Type	Foam-filled Non-marking	
Tire Size	663x283mm	26"x11"
Ground Pressure, Tyres	469.6 kPa	68.1 psi

POWER

Lead-acid Battery	72V 100Ah	
-------------------	-----------	--

HYDRAULIC SYSTEM

Hydraulic Oil Capacity	50L	13.2gal
------------------------	-----	---------

WEIGHT

Machine Weight	4,400kg	9,700 lbs
----------------	---------	-----------

STANDARD FEATURES

- Proportional control
- Foldable guardrail
- Emergency descent
- Tubing explosion-proof system
- Intelligent diagnostic system
- Flashing beacons
- Floating function
- Automatic braking system
- Over-tilt protection system
- Safety arm for troubleshooting
- Telematics
- Alarm
- One-way platform extension deck
- Hydraulic outriggers
- Non-marking tyres

OPTIONS

- AC power to platform

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.