



T34J-2

TELESCOPIC BOOM LIFT



- Lightweight and compact, the new structure design reduces stowed and transportation dimensions, making it easy to transport via container and trailer, thereby lowering logistics costs.
- The dual power source design, featuring a backup battery for straightforward lifting and lowering movements, effectively addresses emergency situations. Combined with multiple safety protections, it ensures operators to work safely and efficiently.
- Remote software upgrades, parameter adjustments, and remote online diagnosis through telematics.
- The intelligent self-diagnosis function enables quick troubleshooting at the working site.



The 2 Series



www.lgmglifts.com

TELESCOPIC BOOM LIFT

SPECIFICATIONS

MODELS	T34J-2 (T115J-2)	
Measurements	Metric	Imperial
Work Height Max.	36.2m	118'9"
Platform Height Max.	34.2m	112.2"
Horizontal Outreach	21.7m	71'2"
Platform Length	2.44m	8'
Platform Width	0.9m	2'11"
A Stowed Length	13.1m	43'
Length-Transport (jib tucked)	11.3m	37'1"
B Overall Width (axles retracted)	2.4m	7'10"
C Overall Width (axles extended)	4m	13'1"
D Stowed Height	2.74m	9'
Height-Transport	2.74m	9'
E Wheelbase	4.16m	13'8"
F Ground Clearance	0.34m	1'1"

PRODUCTIVITY		
Platform Capacity (unrestricted)	300kg	661 lbs
Platform Capacity (restricted)	450kg	992 lbs
Max. Platform Occupancy	2(unrestricted)/3(restricted)	
Turntable Rotation	360°	
Drive Speed-Stowed	5km/h	3.1mph
Drive Speed-Raised	0.6km/h	0.4mph
Gradeability	45%	
Max. Wind Speed	12.5m/s	28mph
Turning Radius-Inside (axles retracted)	6.6m	21'8"
Turning Radius-Outside (axles retracted)	9m	29'6"
Turning Radius-Inside (axles extended)	2.6m	8'6"
Turning Radius-Outside (axles extended)	6.2m	20'4"
Max. Working Slope	5°/5°	
Tires Type	Foam-filled	
Tires Models	445/50D 710	
Ground Pressure, Tyres	992.8 kPa	144 psi

POWER		
Power Source	Kubota 54.6kW/73.2hp	
Fuel Tank Capacity	150 L	39.6 gal

HYDRAULIC SYSTEM		
Hydraulic Oil Volume	220L	58.1gal

WEIGHT		
Machine Weight	17,600kg	38,801 lbs


STANDARD FEATURES

- OTA remote upgrade
- Intelligent self-diagnosis function
- Auto-leveling platform
- Hydraulic rotating platform 180°
- Full proportional joystick control
- Load sensitive system
- Over-tilt protection system
- Emergency stop button
- Descent alarm
- Flashing beacons
- Horn/Hour meter
- Dual load 300kg/450kg
- Over-head anti-collision protection
- Full-time active oscillating axles

OPTIONAL

- AC power to platform
- Platform work light
- Platform anti-collision module
- Platform auxiliary guardrail
- Platform pipe rack

MACHINE SIZE

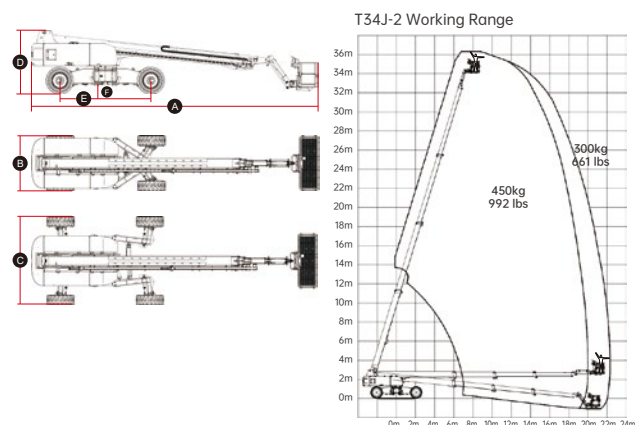

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.